


## ELECTROCHEMICAL GLASS CELL

Type: TC6

### Description

Borosilicate glass cell serves for electrochemical measurements. The analyzed solution can be thermostated by minithermostat MT1.1. Cell openings are designed for stirrer ST1 or mini RDE and connector KA1C.\* for electrochemical sensor AC1 or classical electrodes WCEc, ACEc and RCEc. The device enables the measurement with inserted samples.

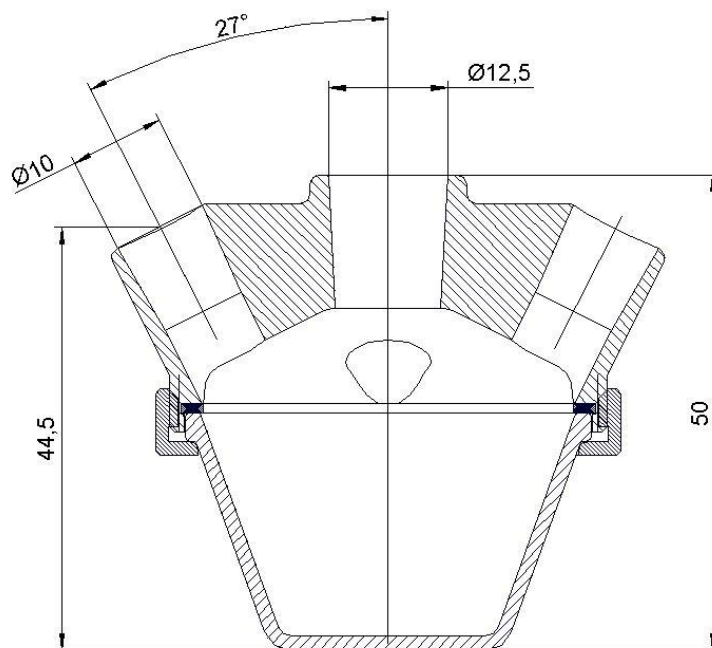

### Physical Parameters

#### *Dimensions:*

Weight: 58 gms  
Length: 59 mm  
Height: 50 mm

### Technical Parameters

Volume from 3 ml to 20 ml

### Optional Equipment

- KA1C.\* connector
- Stirrer ST1
- Mini RDE
- WCEc
- ACEc
- RCEc
- MT1.1

### Device Usage

- Electrochemical measurements
- Measurements with biosensors and electrochemical sensors
- Corrosion measurement



### Ordering Information

- The order is specified by whole product code
- Minimum order quantity - 1 electrochemical cell
- Delivery time for standard TC6 is 4 weeks from receipt of order
- Delivery time for non-standard TC6 depends on final technical specification of order

### Example of Order - 5 pieces - TC6

**Example of application:** Measurement of biochemical activity of a sample

- 1 - Reference electrode RCEc
- 2 - Mini RDE
- 3 - Auxiliary electrode ACEc
- 4 - Sample with active surface

