

## PASTE ELECTRODE

Type: PE.W4

### Description

The PE consists of a PEEK body containing screw and piston with contact. The electrode itself is polyethylene tip profiled with paste. The graphite paste is delivered as a standard electrode. Standard connection is with a 2 mm banana plug. Paste electrode (PE) is designed for measurements with TC4, TC5 and TC6 glass cell. PE is used for measurement of cyclic voltammetry and stripping voltammetry. The tip with paste is exchangeable.



### Physical Parameters

#### *Dimensions:*

Length: 71 mm  
Diameter: 16 mm  
Weight: 7 gms

### Electrode material


PE.W4 (Paste Electrode)

P - Paste
E - Electrode
W - Electrode material
4 - graphite

### Delivery Paste electrode contains

- Paste electrode with tip with Pt paste
- 4 pieces of empty tips
- Connecting cable

### Cyclic voltammetry (Ferro-Ferricyanide, scan rate 10 mV/s; 50 mV/s; 100 mV/s)

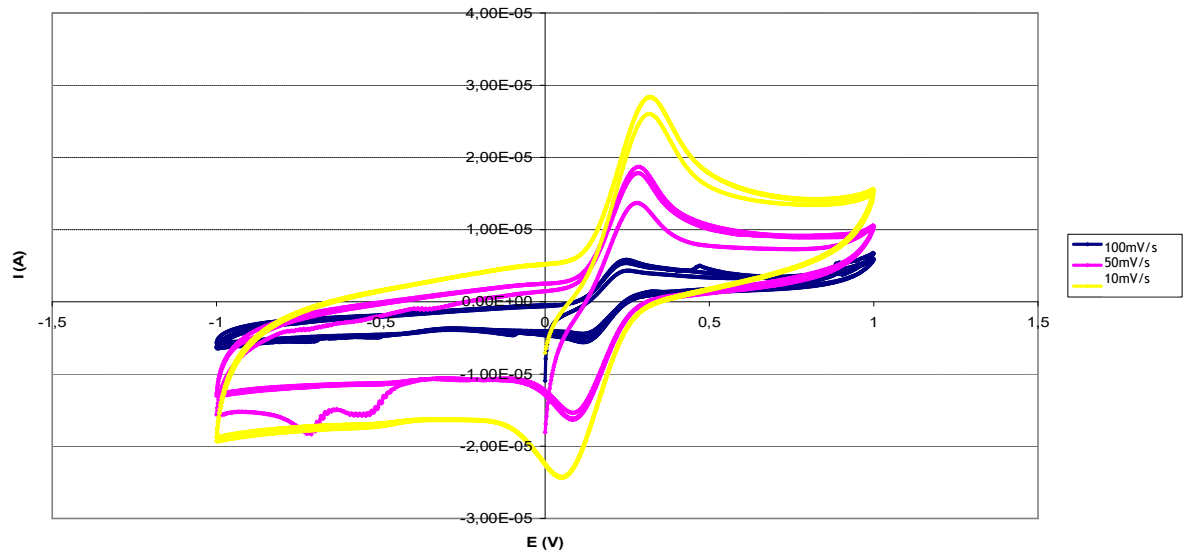

### Ordering Information

- The order is specified by whole product code
- Minimum order quantity - 1 electrode
- Delivery time for standard PE.W4 electrode is 4 weeks from receipt of order
- Delivery time for non-standard PE.W4 electrode depends on final technical specification of order

**Example of Order** - 10 pieces - PE.W4

### **Connecting cable**

Look at the cables catalog, and choose the one you need.